

Series 30

With
laser
edgebanding
!




Quality around the clock!

meta
Cubicles & Lockers

For dry or wet areas

Laser edgebanding

- Perfect look
- Better water and moisture resistance
- Welded by high performance laser with invisible adhesion joint
- Increased bonding results
- No gap between edgeband and panel
- Meets highest quality requirements
- Less insensitive to dirt

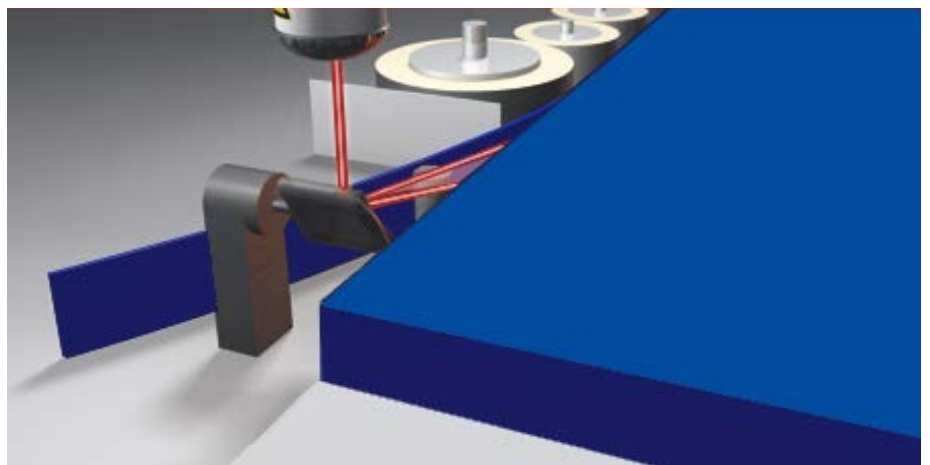

Dry area

30 mm chipboard faced with textured melamine resin on both sides. All visible edges with PP laser edgebanding.

For normal use in dry areas.



Wet area

30 mm panels consisting of a 24 mm high-strength and water-resistant PU core with 3 mm HPL panels on both sides.

For normal use in wet areas.



Versions

Standard version

Visible aluminium door stop profile


Dry area
Type 30 RW

Wet area
Type 30 NR

Height: 2015 mm
Clearance: 150 mm
Headroom: 1995 mm

or

Height: 2155 mm
Clearance: 150 mm
Headroom: 2135 mm

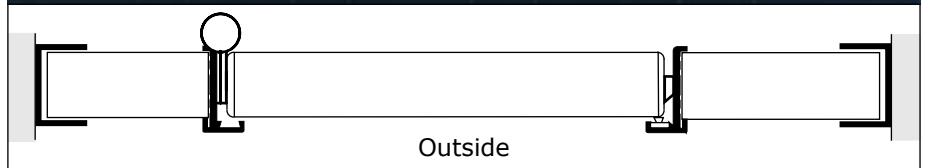

Flush-mounted version

Embedded aluminium door stop profile invisible from the outside.


Dry area
Type 30 FT

Wet area
Type 30 FN

Height: 2015 mm
Clearance: 150 mm
Headroom: 1995 mm

or

Height: 2155 mm
Clearance: 150 mm
Headroom: 2135 mm

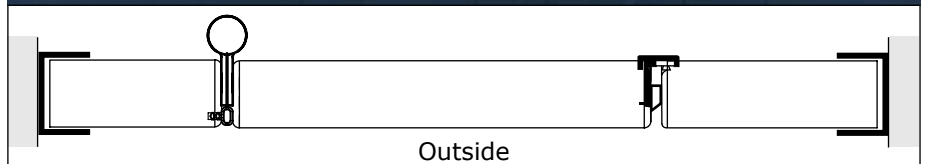

Versions

Floating version

Support legs are
set back 160 mm

Height: 2015 mm
Clearance: 150 mm
Headroom: 1995 mm

or

Height: 2155 mm
Clearance: 150 mm
Headroom: 2135 mm



Suspended version

An aluminium supporting
profile, 160 mm high,
ensures a span up to
about 6 m without support
legs

Height: 2155 mm
Clearance: 150 mm
Headroom: 1995 mm

or

Height: 2295 mm
Clearance: 150 mm
Headroom: 2135 mm



Version without clearance

The cubicles are
flush-mounted to the floor

Height: 2015 mm
Headroom: 1995 mm



Full height versions

Full height version

with panels made of same material as cubicles



Full height version

with plexiglas either transparent or ornamental.
Other materials on request.



Perfect design as standard

meta quality standards without surcharge

- 3-roll stainless steel hinges
- 12 colours for panels
- 7 colours for nylon parts
- 8 colours for profiles and stainless steel hinges
- all visible edges with 3 mm PP-laser edgebanding
- TÜV-certified



3-roll stainless steel hinge



Aluminium profile 20 mm with adjustable nylon rosette



Nylon handle set
23 mm



Hook and buffer



Corner joint



Wall connection


Extras in Nylon, Aluminium or Stainless steel

Nylon						
	Roll holder	Spare roll holder	WC-Symbols	Hook with buffer		
	Aluminium					
		Single handed lock outside	Single handed lock inside			
Stainless steel or Aluminium						
	Handle set U-shaped	Handle set L-shaped	Hook	Buffer	Hook with buffer	
	Stainless steel					
		Single handed lock outside	Single handed lock inside	Rosette	Support angle privacy screen	
						
Roll holder		Spare roll holder	WC-symbols			


Colour Chart

Sheets

Standard colours



90 white




70 grey



22 light beige



81 fango



62 sea green




95 aluminium



77 graphite




31 ruby red




41 mango



54 gentian blue




91 white pepper




71 grey pepper

Special colours mirror gloss



85 SG white




75 SG dark grey

Only available for the following types with surcharge:


Type 30 RW
Design 40

Profiles and accessories


Standard colours




white



grey



red




yellow




dark blue



ultramarine



black



Aluminium anodized (only profiles)

Technical Details 30 RW + 30 NR Standard version

These types are TÜV-certified and have the GS mark (tested for safety).

Height

2015 mm with 150 mm ground clearance,
headroom 1995 mm

2155 mm with 150 mm ground clearance,
headroom 2135 mm

Type 30 RW: 30 mm chipboard faced with textured melamine resin on both sides.

Type 30 NR: 30 mm panels consisting of a 24 mm high-strength and water-resistant PU core with 3 mm HPL textured melamine resin on both sides. Because of weight reasons partition walls are partly made of water resistant rigid foam.

Front Walls

Panels either Type 30 RW or Type 30 NR. All visible edges with PP laser edgebanding (3 mm thick). An aluminium top profile, 43 x 20 mm, covers the entire length of the front wall to give additional stability. Wall connection with aluminium u-profiles, 33 x 30 mm.

Doors

Same material as front walls. All edges with PP laser edgebanding (3 mm thick). All corners and edges radius 3 mm. Aluminium doorstop profile, 38 x 18 mm, with rubber cushion on the lock side for silent closing.

Partitions

Same material as front walls. All visible edges on top and bottom with PP laser edgebanding (3 mm thick). Wall and front connection with aluminium u-profiles, 33 mm x 30 mm.

Support Legs

Powder-coated aluminium profiles, 20 mm diameter, with heavy-duty nylon rosettes, height-adjustable, concealed fixing to the floor.

Hardware

3-roll-hinges made of stainless steel, either polished or powder-coated in 7 colours without surcharge. Nylon handle set (23 mm dia). Inside the cubicle rosette with olive button, outside red/white indicator with emergency opening. Mortice lock with latch and bolt, rounded 20 mm.

Accessories

Each cubicle with 1 nylon coat hook and a door buffer. Concealed fixing.

Colours for profiles and hinges

Anodized or powder-coated, available in 7 colours without surcharge. Supports for privacy screens are available only powder-coated.

Colours for panels

12 colours available without surcharge.

Colours for nylon parts

7 colours available without surcharge.

Privacy Screens wall mounted

400 x 900 mm:

Wall connection with four powder-coated support angles.

30 mm version: same material as front walls.

Glass version: consisting of 2 pieces of glass with a matt foil in between.

Privacy Screens floor mounted

500 x 1850 mm:

Same material as front walls.

Wall connection with four powder-coated support angles.

Bottom of the screen fixed with support leg.



Environmental Protection

We do not use materials containing PVC or asbestos.

Type **30 RW** for dry areas.

Type **30 NR** for wet areas.

All cubicles are pre-fabricated for easy installation on site.

Technical Details 30 FT + 30 FN Flush mounted version

These types are TÜV-certified and have the GS mark (tested for safety).

Height

2015 mm with 150 mm ground clearance, headroom 1995 mm
2155 mm with 150 mm ground clearance, headroom 2135 mm

Type 30 FT: 30 mm chipboard faced with textured melamine resin on both sides.

Type 30 FN: 30 mm panels consisting of a 24 mm high-strength and water-resistant PU core with 3 mm HPL textured melamine resin on both sides. Because of weight reasons partition walls are partly made of water resistant rigid foam.

Front Walls

Panels either Type 30 FT or Type 30 FN. All visible edges with PP laser edgebanding (3 mm thick). An aluminium top profile, 43 x 20 mm, covers the entire length of the front wall to give additional stability. Wall connection with aluminium u-profiles, 33 x 30 mm. Pilaster panels with more than 100 mm width with support leg.

Doors

Same material as front walls. All edges with PP laser edgebanding (3 mm thick). All corners and edges radius 3 mm. Embedded aluminium doorstop profile, 21 x 17,5 mm. Rubber cushion on the lock side for silent closing.

Partitions

Same material as doors. All visible edges on top and bottom with PP laser edgebanding (3 mm thick). Wall and front connection with aluminium u-profiles, 33 mm x 30 mm.

Support Legs

Powder-coated aluminium profiles, 20 mm diameter, with heavy-duty nylon rosettes, height-adjustable, concealed fixing to the floor.

Hardware

3-roll-hinges made of stainless steel, either polished or powder-coated in 7 colours without surcharge. Nylon handle set (23 mm dia). Inside the cubicle rosette with olive button, outside red/white indicator with emergency opening. Mortice lock with latch and bolt, rounded 20 mm.

Accessories

Each cubicle with 1 nylon coat hook and a door buffer. Concealed fixing.

Colours for profiles and hinges

Anodized or powder-coated, available in 7 colours without surcharge. Supports for privacy screens are available only powder-coated.

Colours for panels

12 colours available without surcharge.

Colours for nylon parts

7 colours available without surcharge.

Privacy Screens wall mounted

400 x 900 mm:

Wall connection with four powder-coated support angles.

30 mm version: same material as front walls.

Glass version: consisting of 2 pieces of glass with a matt foil in between.

Privacy Screens floor mounted

500 x 1850 mm:

Same material as front walls.

Wall connection with four powder-coated support angles.

Bottom of the screen fixed with support leg.



Environmental Protection

We do not use materials containing PVC or asbestos.

Type **30 FT** for dry areas.

Type **30 FN** for wet areas.

All cubicles are pre-fabricated for easy installation on site.

Good reasons to buy our products


Highest quality

Our products meet your requirements - Quality made in Germany.



Latest technology

We are the only company in our business that uses laser for edgebanding.

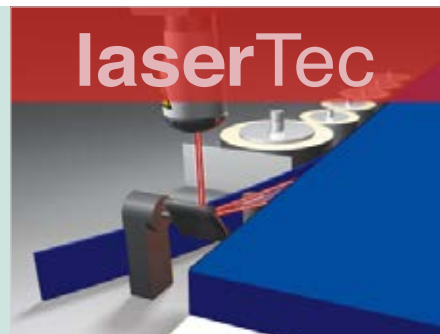

High Tech

We produce with most modern machinery.



Fast and reliable

Due to production time 6 days a week 24 hours a day all your orders will be delivered in time.



Competitive prices

We offer you good prices.





meta

Trennwandanlagen

GmbH & Co.KG

Metastraße 2
D-56579 Rengsdorf
Tel. +49 26 34 / 66-0
Fax +49 26 34 / 66 450

www.meta.de
info@meta.de

Technical alterations of the illustrated products are subject to variation. Due to the printing technique colours may differ from the original.
30-01-44

ABEO 
Part of the ABEO Group